



Dimensions

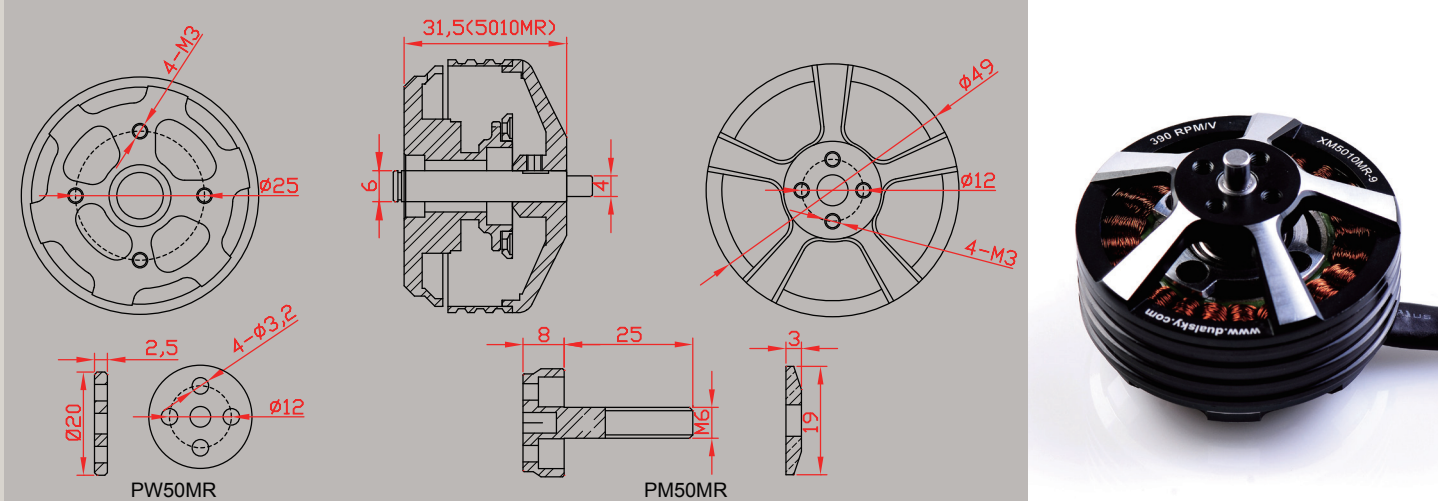


Specification

Xmotor Multi-Rotor		XM5010MR 7.5T	XM5010MR 9 TURNS	XM5010MR 11 TURN
RPM/V(KV值)	(KV)	480	390	320
Weight w/o wires(重量)	(g)	114	114	114
Diameter(直径)	(mm)	50	50	50
Length(长度)	(mm)	31	31	31
Diameter of Shaft(轴径)	(mm)	4.0, 6.0	4.0, 6.0	4.0, 6.0
Mounting holes pitch(安装孔距)	(mm)	25/25	25/25	25/25
Slots,Poles(极数)		24, 28	24, 28	24, 28
Idle Current(空载电流)	(Io) @10V(A)	0.8	0.55	0.4
Resistance(内阻)	(Ri)(mOhm)	79	92	110
Cruising power(巡航功率)	(W)[8 mins]	230	305	285
Bursts current(最大电流)	(A)[15s]	28	25	23
Peak power(峰值功率)	(W)[15s]	418	555	515
Input wire(输入线)		18AWG, 600mm	18AWG, 600mm	18AWG, 600mm
Recommended ESC(推荐调速器)		XC-401-MR	XC-401-MR	XC-401-MR
Setup 1(配置1)	(No. of Cell, Prop.)	4S, 15x5	6S, 15x5	6S, 15x5
Weight of quad-copter(4轴重量)	(kg)	2.6	3.4	3.2
Weight of hex-copter(六轴重量)	(kg)	3.8	5.1	4.7

XM5010MR-7.5

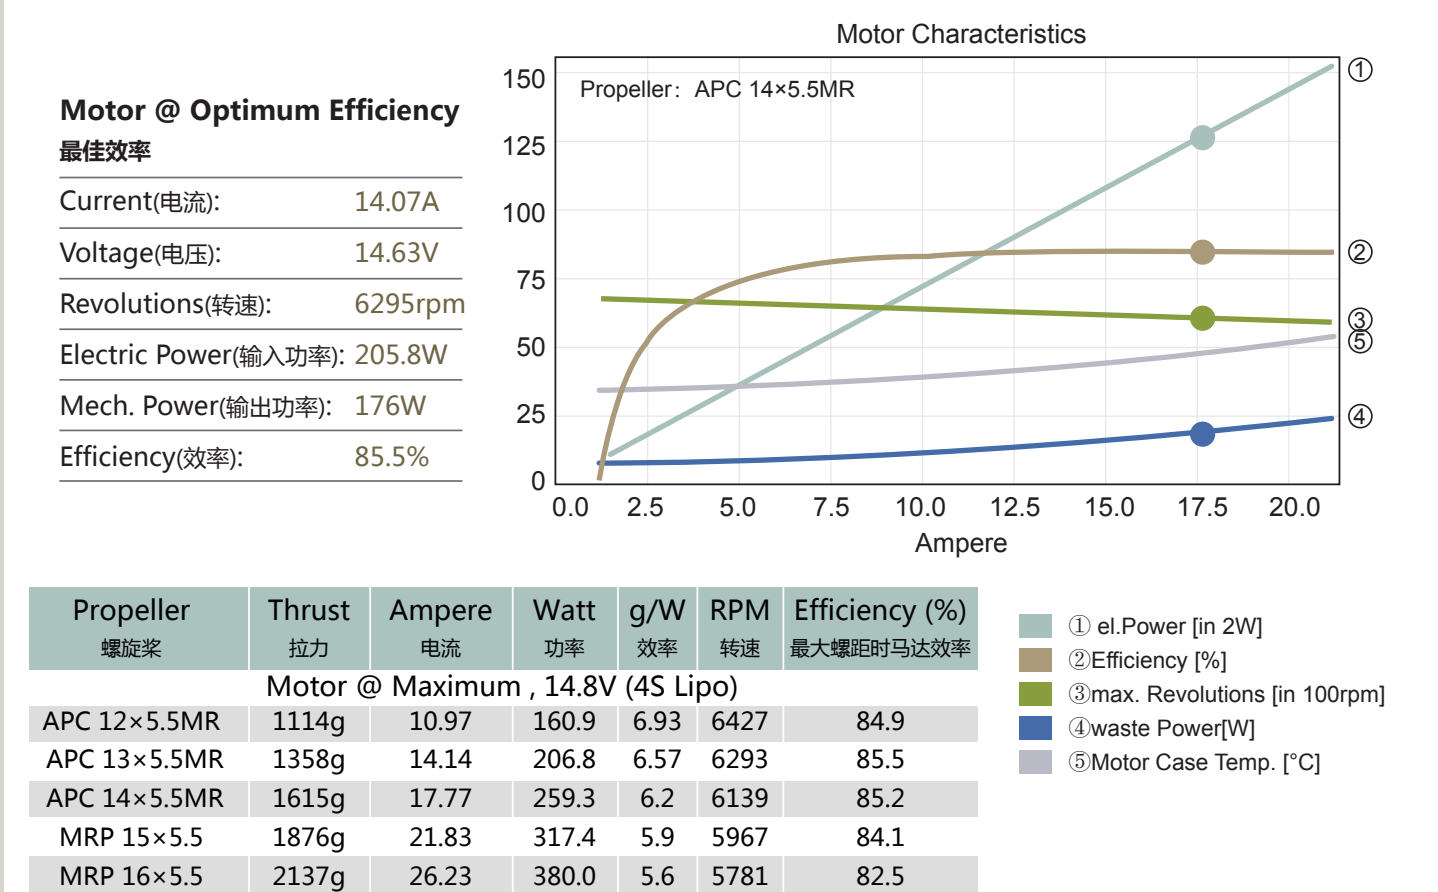

XM5010MR-9

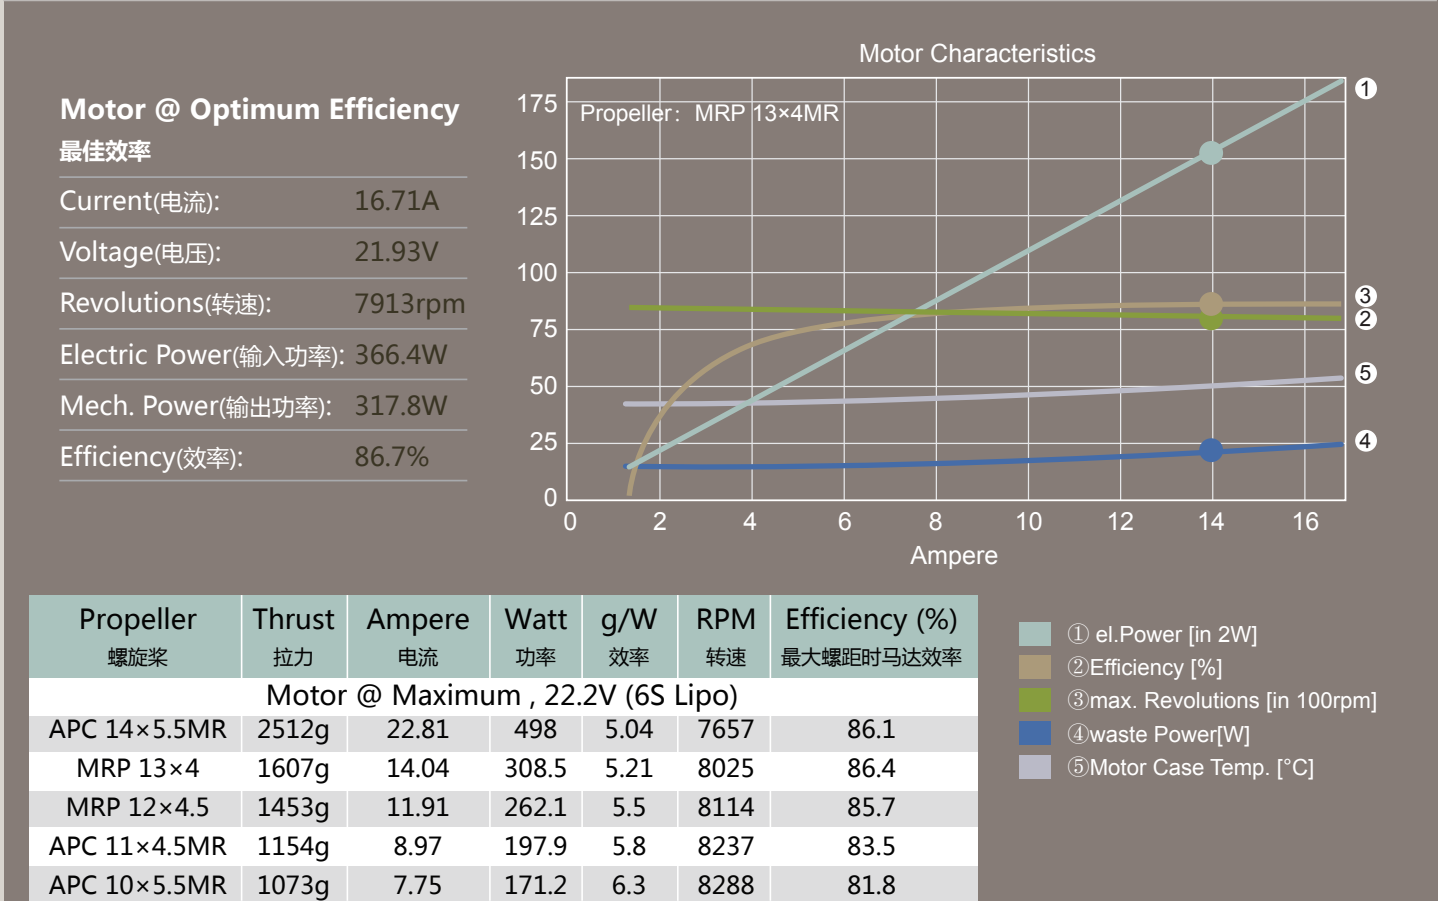

XM5010MR-11

