


Dimensions



Specification

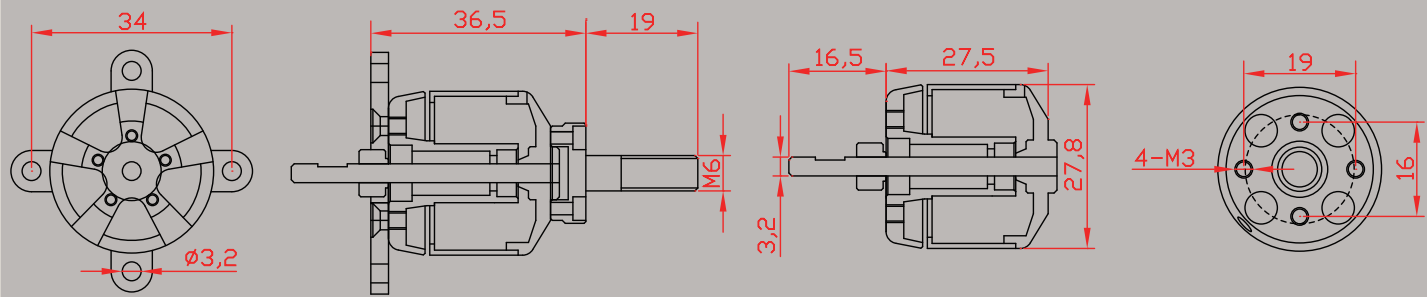

Dualsky Xmotor CA2 Series	XM2830CA			
Item No.(商品编码)	55119	55120	55121	55323
Model - Turns(马达转速)	XM2830CA-8	XM2830CA-10	XM2830CA-12	XM2830CA-14
RPM/V(KV)(KV值)	1480	1180	980	830
Stator Diameter(定子直径)	22	22	22	22
Magnet length(磁铁长度)	12	12	12	12
Shaft diameter(轴径)	3.2	3.2	3.2	3.2
Mountingholes pitch(安装孔距)	16/19	16/19	16/19	16/19
Weight(g)(重量)	55	55	55	55
Resistance(Ri)(mOhm)(电阻)	55	90	132	145
Idle Current(Io) @10V (A)(空载电流)	1.27	0.88	0.77	0.57
No.of Cells(LiPo)(电池节数)	2..3	2..3	2..3	2..4
Max. EfficiencyCurrent[A](效率电流)	15	14	13	12
Max. Burst Current (15s)[A](最大电流)	20	19	17	15
Max. Power(15s)(最大功率)	200W	200W	200W	200W
Input Connectors[mm](金插)	GC3	GC3	GC3	GC3
Recommended ESC(推荐调速器)	XC1812BA	XC1812BA	XC1812BA	XC1812BA
Prop. Range(螺旋桨)	8x5...9x5	9x4.7...10x5	9x4.7...10x5	9x4.7...10x5
App. Class(适用机种)	550-800g 400 size			