


Dimensions



Specification

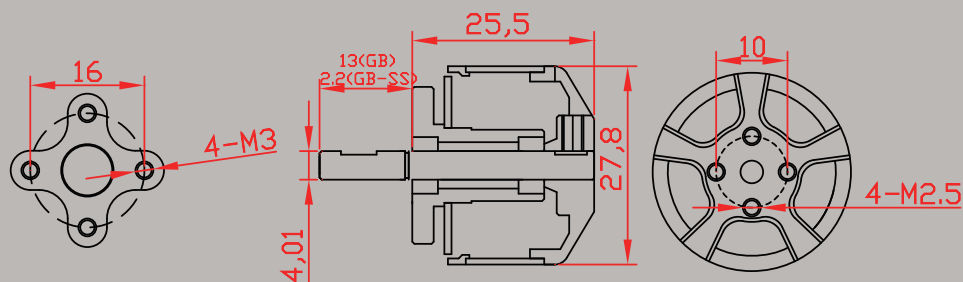

Xmotor Brushless Gimbal Outrunner	XM2826GB	XM2826GB-SS
Item NO. (商品编码)	51132	51133
Weight(g) (重量)	41	38
Motor dimension[DxL] (mm) (电机尺寸)	27.8x25.4	27.8x25.4
Stator dimension[DxL] (mm) (定子尺寸)	22x08	22x08
Configuration (配置)	12N14P	12N14P
Copper wire(OD,mm) (铜线)	0.17	0.17
Turns (圈数)	83	83
Winding type (盘式)	WYE	WYE
Max nominal voltage(V) (最高电压)	16	16
Resistance(Ri)(Ohm) (电阻)	12.6	12.6
Idle current@10V(mA)(空载电流)	97	97
Max.stall current(A) (最大瞬间电流)	1.0	1.0
Diameter of Shaft(mm) (轴径)	4.0	4.0
Length of Shaft (mm) (轴长)	12	N/A
Stator mounting holes[Pitch,Size](mm) (定子安装孔)	16,4xM2.5	16,4xM2.5
Rotor mounting holes[Pitch, Size] (mm) (转子安装孔)	10,4xM2.5	10,4xM2.5
Flexible wire solder board (灵活的焊线板)	Y	Y
Max.weight of gimbal/camera(kg) (云台或者相机的最大重量)	0.4	0.4
Memo (备注)	Long shaft w/adapter	Shorten shaft